



Chip Inductors - 1812CS Series (4532)

- Higher SRF values than 1812 size parts with ferrite cores
- 5% tolerances for all values
- 19 inductance values from 1.0 to 33 μ H

Request free evaluation samples by contacting Coilcraft or visiting www.coilcraft.com.

Part number ¹	Inductance ² (μ H)	Percent tolerance ³	Q min ⁴	SRF min ⁵ (MHz)	DCR max ⁶ (Ohms)	Irms ⁷ (mA)
1812CS-102XJL_	1.0 @ 7.9 MHz	5	60 @ 50 MHz	310	1.2	480
1812CS-122XJL_	1.2 @ 7.9 MHz	5	62 @ 50 MHz	230	1.2	480
1812CS-152X_L_	1.5 @ 7.9 MHz	5,2	65 @ 50 MHz	210	1.6	430
1812CS-182XJL_	1.8 @ 7.9 MHz	5	68 @ 50 MHz	190	2.0	380
1812CS-222X_L_	2.2 @ 7.9 MHz	5,2	63 @ 50 MHz	170	2.2	340
1812CS-272XJL_	2.7 @ 7.9 MHz	5	63 @ 50 MHz	160	3.2	300
1812CS-332XJL_	3.3 @ 7.9 MHz	5	65 @ 50 MHz	145	3.8	270
1812CS-392X_L_	3.9 @ 7.9 MHz	5,2	69 @ 50 MHz	130	5.0	240
1812CS-472XJL_	4.7 @ 7.9 MHz	5	63 @ 50 MHz	115	5.4	230
1812CS-562XJL_	5.6 @ 7.9 MHz	5	59 @ 50 MHz	100	5.7	220
1812CS-682XJL_	6.8 @ 7.9 MHz	5	60 @ 50 MHz	90	6.6	210
1812CS-822XJL_	8.2 @ 7.9 MHz	5	47 @ 50 MHz	80	7.0	200
1812CS-103XJL_	10 @ 7.9 MHz	5	36 @ 50 MHz	70	7.7	190
1812CS-123XJL_	12 @ 2.5 MHz	5	35 @ 10 MHz	60	8.7	180
1812CS-153X_L_	15 @ 2.5 MHz	5,2	34 @ 10 MHz	50	9.6	170
1812CS-183XJL_	18 @ 2.5 MHz	5	30 @ 10 MHz	45	10.5	160
1812CS-223X_L_	22 @ 2.5 MHz	5,2	32 @ 10 MHz	40	11.5	155
1812CS-273XJL_	27 @ 2.5 MHz	5	29 @ 10 MHz	30	12.5	150
1812CS-333X_L_	33 @ 2.5 MHz	5,2	20 @ 10 MHz	20	13.5	145

1. When ordering, specify **tolerance, termination and packaging** codes:

1812CS-333X**G**L**C**

Tolerance: G = 2% J = 5% (Table shows stock tolerances in bold.)

Termination: L = RoHS compliant silver-palladium-platinum-glass frit. Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape (600 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.

D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (2200 parts per full reel).

2. Inductance measured using a Coilcraft SMD-A fixture in an Agilent/HP 4286A impedance analyzer with Coilcraft-provided correlation pieces.

3. Tolerances in bold are stocked for immediate shipment.

4. Q measured using an Agilent/HP 4291A with an Agilent/HP 16193 test fixture.

5. SRF measured using an Agilent/HP 8753D network analyzer and a Coilcraft SMD-D test fixture.

6. DCR measured on a Cambridge Technology micro-ohmmeter and a Coilcraft CCF859 test fixture.

7. Current that causes a 15°C temperature rise from 25°C ambient.

8. Electrical specifications at 25°C.

See Qualification Standards section for environmental and test data.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Designer's Kit C337 contains 10 of each 5% part

Core material Ceramic

Terminations RoHS compliant silver-palladium-platinum-glass frit. Other terminations available at additional cost.

Weight 109 – 128 mg

Ambient temperature -40°C to +125°C with I rms current, +125°C to +140°C with derated current

Storage temperature Component: -40°C to +140°C. Packaging: -55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +25 to +125 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Mean Time Between Failures (MTBF) 1 billion hours

Packaging 600 per 7" reel; 2200 per 13" reel. Plastic tape: 12 mm wide, 0.3 mm thick, 8 mm pocket spacing, 3.7 mm pocket depth

PCB washing Only pure water or alcohol recommended

COILCRAFT ACCURATE
PRECISION REPEATABLE
MEASUREMENTS
SEE INDEX **TEST FIXTURES**

Coilcraft®

Specifications subject to change without notice.
Please check our website for latest information.

Document 105-1 Revised 09/21/07


1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>




Chip Inductors - 1812CS Series (4532)



Typical Q vs Frequency

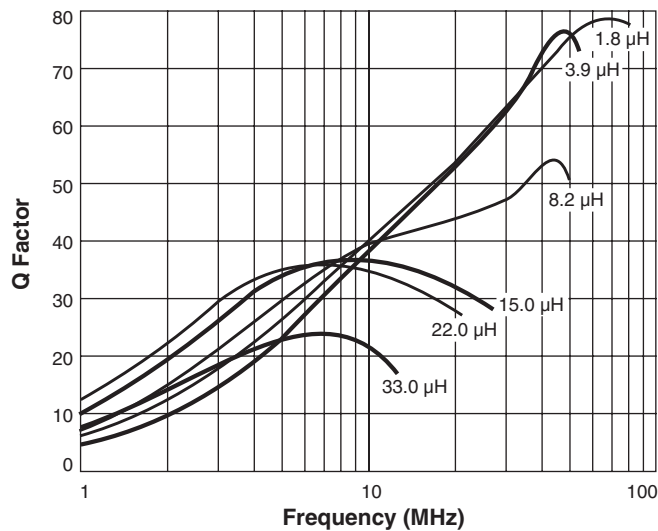

Typical L vs Frequency

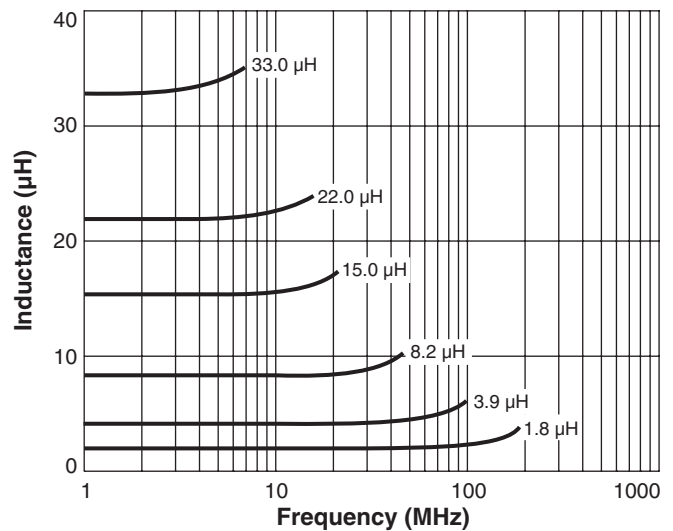

Irms Derating

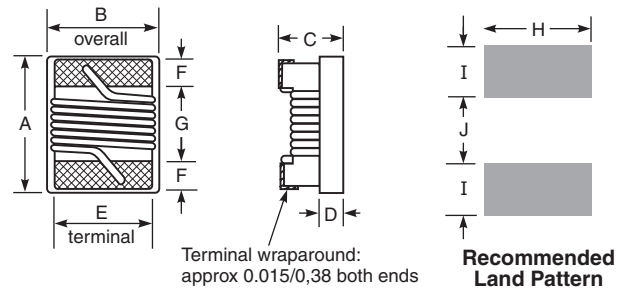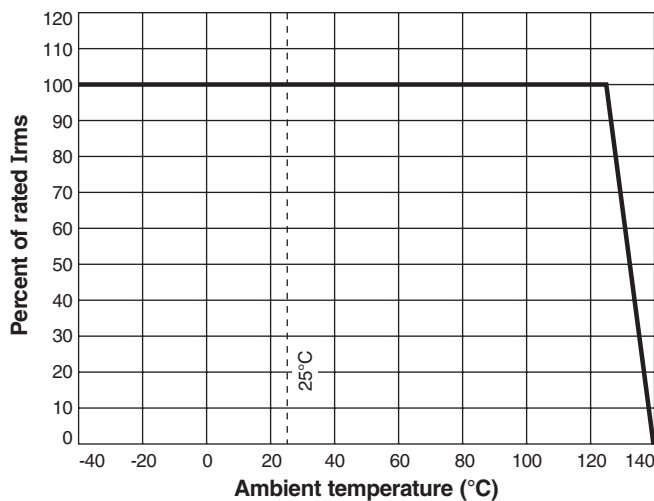

A	B	C	D	E	F	G	H	I	J
max	max	max	ref						
0.195	0.150	0.135	0.070	0.100	0.025	0.128	0.120	0.045	0.118 inches
4,95	3,81	3,43	1,78	2,54	0,64	3,25	3,05	1,14	3,00 mm

Coilcraft[®]

Specifications subject to change without notice.
Please check our website for latest information.

Document 105-2 Revised 09/21/07

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>