




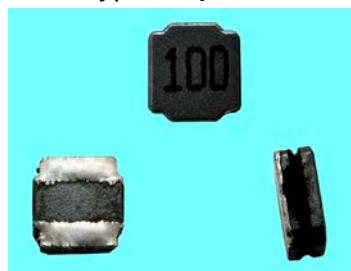


Type: FLQH4010




Dimensions外形尺寸(mm)



Recommended Land Pattern(mm)



PRODUCT IDENTIFICATION/產品標識

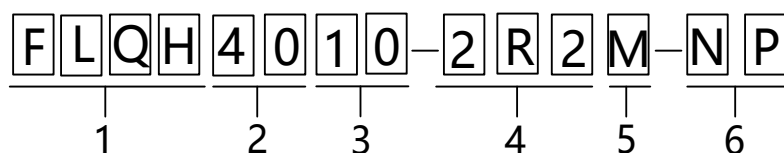

1.Product symbol/產品類型: FLQH(shield/屏蔽)

2.Body length/產品長度: mm

3.Body height/產品高度: mm

4.Inductance/感量: μ H

5.Tolerance/公差: M $\pm$ 20%, N $\pm$ 30%

6.RoHs Compliant(SGS Certified)

本產品滿足環境保護要求(有害物質限用)



FEATURES:

- Quantity/reel:5000PCS.
- Square 4.0mm type(4.2mm Max),Height 1.0mm Max.
- Magnetic-resin shielded construction reduces buzz noise to ultra-low levels.
- Widely use in DC-DC converter/Notebook/Camcorders/HDTV .

特長:

- 數量/卷:5000PCS.
- 方形4.0mm(4.2mm Max),高度1.0mm Max.
- 磁性樹脂屏蔽結構將噪聲降至超低水平.
- 廣泛應用於升降壓轉換器/筆記本電腦/攝像機/高清電視.

ELECTRICAL CHARACTERISTICS/電氣特性

Part NO. 品名	Inductance 電感量(μ H)	Tolerance 公差(%)	RDC直流電阻 Max(Ω)	SRF(MHz) Min.	I sat(Max) 飽和電流(A)	I rms(Max) 溫升電流(A)
FLQH4010-1R0	1.0	N	0.067	116	2.00	1.90
FLQH4010-1R5	1.5	N	0.084	94	1.68	1.70
FLQH4010-2R2	2.2	M	0.102	73	1.20	1.50
FLQH4010-3R3	3.3	M	0.120	58	1.10	1.40
FLQH4010-4R7	4.7	M	0.168	47	0.95	1.20
FLQH4010-6R8	6.8	M	0.240	38	0.80	1.00
FLQH4010-100	10	M	0.360	31	0.62	0.75
FLQH4010-150	15	M	0.516	24	0.54	0.60
FLQH4010-220	22	M	0.684	19	0.45	0.50

Inductance Range/電感範圍:1.0~22 μ H

Operating Temperature/工作溫度: -40°C ~ +125°C

Storage Temperature/儲存溫度: -40°C ~ +125°C

(1) Test frequency :100KHz/1.0V;

(2) The maximum allowable current is a DC current which causes initial inductance to decrease by 30%,or temperature to rise by 40°C, whichever is smaller(At ambient reference temperature:25°C).

(1) 電感測試頻率:100KHz/1.0V;


(2) 最大容許電流定義:電感下降30%或溫度上升40°C時,取其小值作為最大容許電流(周圍環境溫度25°C)。



Electrical Schematic/原理圖



Recommended Temperature Conditions of Air Reflow Soldering/推薦回流焊溫度條件

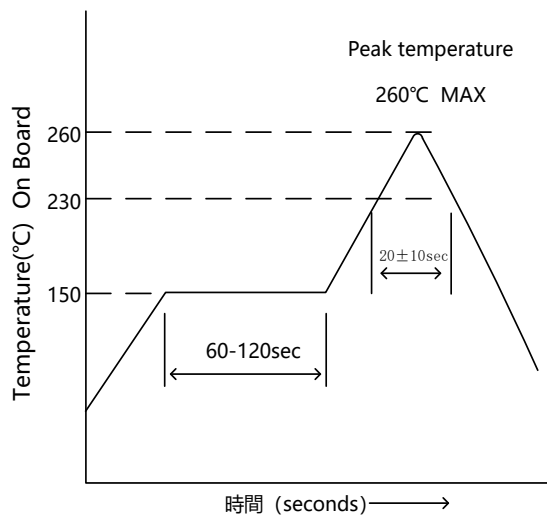

In addition to the standards versions shown here, custom inductors are also available to meet your exact requirements.

除了這裡顯示的標準品之外,可根據客戶要求進行設計.

www.fonrita.com